


PP Drainage & Sewer Systems

GWR25371545S

DN375 x dn150 x 45° BlackMax® Reducing Junction FFF x DWV SWJ Branch (PVC Fab)

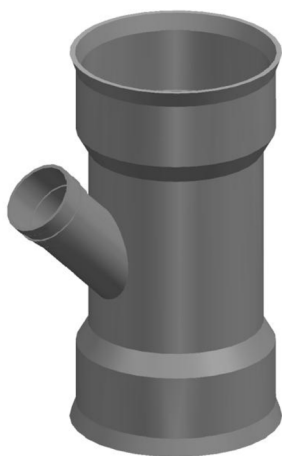

Application

Stormwater drainage

Features

- Australian Made
- Abrasion and Corrosion Resistant
- Tree root intrusion resistance
- Smooth internal bore for hydraulic performance
- Low embodied energy for environmental benefits

Technical Data


Product Properties

Material	PVC
Colour	Black external wall with white internal bore
Approximate mass	10.0 kg
Additional Information	Requires 2 x DN375 BlackMax Rubber Ring Iplex Code: GERSEW375

*For short term, intermittent exposure. Contact Iplex for further details

Product Dimensions

Nominal Size	375 mm
Angle (degrees)	45°

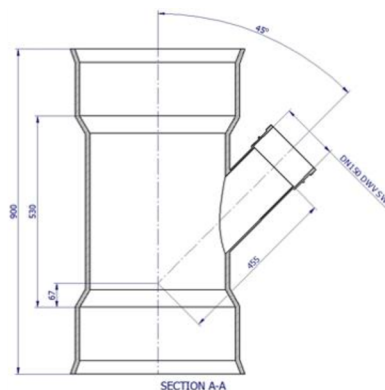

Jointing Details

Joint type	RRJ & SWJ
Rubber ring material	Styrene Butadiene Rubber (SBR)
Average number of joints per Litre - lubricant	22
Maximum socket deflection	up to 2°

PP Drainage & Sewer Systems

GWR25371545S
**DN375 x dn150 x 45° BlackMax® Reducing
Junction FFF x DWV SWJ Branch (PVC Fab)**

Standards

Environmental Declarations and Standards

Product standard	AS/NZS1260 PVC-U pipes and fittings for drain, waste and vent applications' & 'AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications'
------------------	---

Material Properties

Thermal

Allowable Operating Temperature - Degrees	Allowing Operating Temperature. Up to 50°C Re rating is applied for Temperatures >30°C
---	--

Need help? | Merchants 1300 0 47539 | Civil 13 10 86

www.iplex.com.au