

PP Drainage & Sewer Systems

GR25451545

DN450 X dn150 x 45° BlackMax® Reducing Junction FFF RRJ (PP Fab)



Application

Stormwater drainage

Features

- Australian Made
- Abrasion and Corrosion Resistant
- Tree root intrusion resistance
- Smooth internal bore for hydraulic performance
- Low embodied energy for environmental benefits

Technical Data


Product Properties

Material	POLYPROPYLENE
Colour	Black external wall with yellow internal bore
Approximate mass	35.0 kg
Additional Information	Requires 2 x DN450 BlackMax Rubber Rings Iplex Code: GERSEW450 and 1 x dn150 DWV RRJ Coupling Iplex Code: DR57150

*For short term, intermittent exposure. Contact Iplex for further details

Product Dimensions

Nominal Size	450 mm
Angle (degrees)	45°

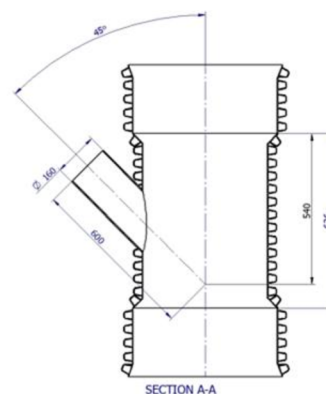

Jointing Details

Joint type	RRJ
Rubber ring material	Styrene Butadiene Rubber (SBR)
Average number of joints per Litre - lubricant	18
Maximum socket deflection	up to 2°

PP Drainage & Sewer Systems

GR25451545
**DN450 X dn150 x 45° BlackMax® Reducing
Junction FFF RRJ (PP Fab)**

Standards

Environmental Declarations and Standards

Product standard

AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications'

Material Properties

Thermal

Allowable Operating Temperature - Degrees

Allowing Operating Temperature. Up to 50°C Re rating is applied for Temperatures >30°C

Need help? | Merchants 1300 0 47539 | Civil 13 10 86
www.iple.com.au