


PP Drainage & Sewer Systems

GWR50301090S

BlackMax® PVC Stormwater Saddle DN300 x DN100 x 90° DWV SWJ

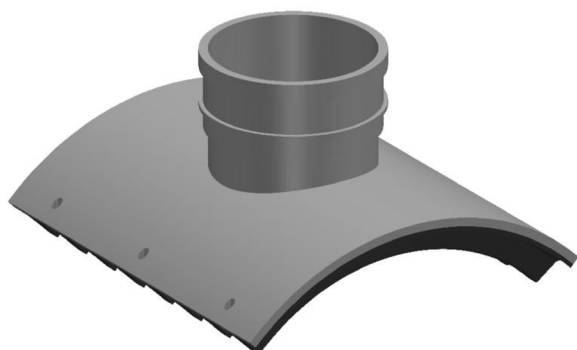

Application

Stormwater drainage

Features

- Designed for use with BlackMax® pipe
- Ease of installation
- Allows lateral connection of standard DWV PVC property drains up to DN225
- No pipe protrusion at the connection

Technical Data


Product Properties

Material	PVC
Colour	White
Approximate mass	2.0 kg
Additional Information	Use fasteners supplied with the saddle only

*For short term, intermittent exposure. Contact Iplex for further details

Product Dimensions

Nominal Size	300 mm
Angle (degrees)	90°
Dimension 'I'	280 mm x 80 mm



Packaging Information

Carton Quantity	3
-----------------	---

Jointing Details

Joint type	SWJ
Rubber ring material	Polyurethane

PP Drainage & Sewer Systems

GWR50301090S
BlackMax® PVC Stormwater Saddle DN300 x DN100 x 90° DWV SWJ

Standards

Environmental Declarations and Standards

Product standard	AS/NZS1260 PVC-U pipes and fittings for drain, waste and vent applications' & 'AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications'
------------------	---

Material Properties

Mechanical

Density 'Specific Gravity'	1.45
----------------------------	------

Thermal

Allowable Operating Temperature - Degrees	Allowing Operating Temperature. Up to 50°C Re rating is applied for Temperatures >30°C
---	--

Need help? | Merchants 1300 0 47539 | Civil 13 10 86

www.iple.com.au