


PP Drainage & Sewer Systems

# GWR50301590S

## BlackMax® PVC Stormwater Saddle DN300 x DN150 x 90° DWV SWJ

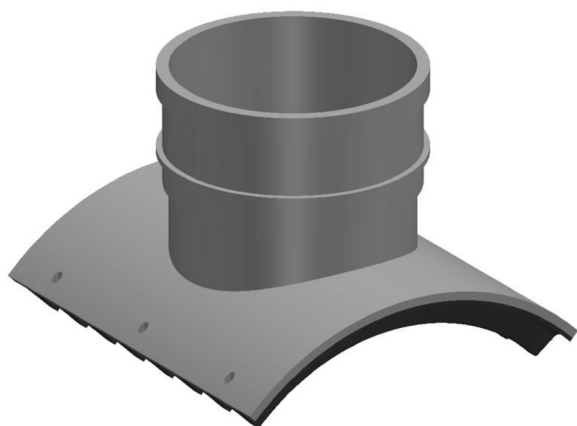

### Application

Stormwater drainage

### Features

- Designed for use with BlackMax® pipe
- Ease of installation
- Allows lateral connection of standard DWV PVC property drains up to DN225
- No pipe protrusion at the connection

## Technical Data


### Product Properties

|                        |                                             |
|------------------------|---------------------------------------------|
| Material               | PVC                                         |
| Colour                 | White                                       |
| Approximate mass       | 2.5 kg                                      |
| Additional Information | Use fasteners supplied with the saddle only |

\*For short term, intermittent exposure. Contact Iplex for further details

### Product Dimensions

|                 |                 |
|-----------------|-----------------|
| Nominal Size    | 300 mm          |
| Angle (degrees) | 90°             |
| Dimension 'I'   | 280 mm x 120 mm |



### Packaging Information

|                 |   |
|-----------------|---|
| Carton Quantity | 2 |
|-----------------|---|

### Jointing Details

|                      |              |
|----------------------|--------------|
| Joint type           | SWJ          |
| Rubber ring material | Polyurethane |

PP Drainage &amp; Sewer Systems

**GWR50301590S**
**BlackMax® PVC Stormwater Saddle DN300 x DN150 x 90° DWV SWJ**

## Standards

### Environmental Declarations and Standards

|                  |                                                                                                                                                                                       |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product standard | AS/NZS1260 PVC-U pipes and fittings for drain, waste and vent applications' & 'AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications' |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Material Properties

### Mechanical

|                            |      |
|----------------------------|------|
| Density 'Specific Gravity' | 1.45 |
|----------------------------|------|

### Thermal

|                                           |                                                                                        |
|-------------------------------------------|----------------------------------------------------------------------------------------|
| Allowable Operating Temperature - Degrees | Allowing Operating Temperature. Up to 50°C Re rating is applied for Temperatures >30°C |
|-------------------------------------------|----------------------------------------------------------------------------------------|

**Need help? | Merchants 1300 0 47539 | Civil 13 10 86**

**[www.iplex.com.au](http://www.iplex.com.au)**