


PP Drainage & Sewer Systems

GR106225

DN225 BlackMax® Drainage Pipe Plug RRJ (PP Fab)

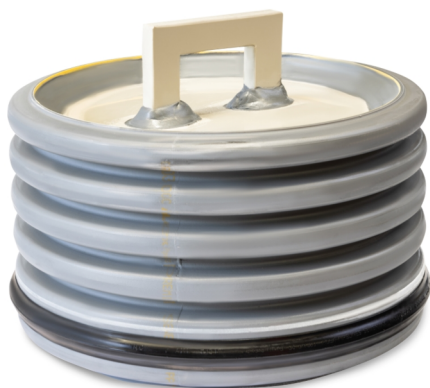

Application

Stormwater drainage

Features

- Australian Made
- Abrasion and Corrosion Resistant
- Tree root intrusion resistance
- Smooth internal bore for hydraulic performance
- Low embodied energy for environmental benefits

Technical Data

Product Properties

Material	POLYPROPYLENE
Colour	Black external wall with yellow internal bore
Nominal stiffness	SN10
Approximate mass	1.12 kg
Additional Information	Requires 1 x DN225 BlackMax Rubber Ring Iplex Code: GERSEW225

*For short term, intermittent exposure. Contact Iplex for further details

Product Dimensions

Nominal Size	225 mm
--------------	--------

Jointing Details

Joint type	RRJ
Rubber ring material	Styrene Butadiene Rubber (SBR)
Average number of joints per Litre - lubricant	36
Maximum socket deflection	up to 2°

Standards

Environmental Declarations and Standards

Product standard	AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications'
------------------	--

PP Drainage & Sewer Systems

GR106225
DN225 BlackMax® Drainage Pipe Plug RRJ (PP Fab)

Material Properties

Thermal

Allowable Operating Temperature - Degrees

Allowing Operating Temperature. Up to 50°C Re rating is applied for Temperatures >30°C

Need help? | Merchants 1300 0 47539 | Civil 13 10 86

www.iple.com.au