


PP Drainage & Sewer Systems

# GWR25221090S

## BlackMax® PVC Reducing Tee DN225 x DN100 FFF Max RRJ x DWV SWJ Black/White

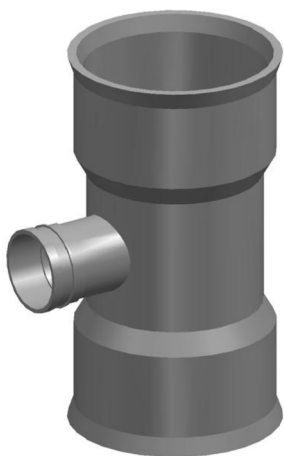

### Application

Stormwater drainage

### Features

- Allows 90° branch connection
- Polypropylene
- Compatible with BlackMax® pipe
- RRJ
- Lightweight
- Corrosion resistant
- Provides complete plastic system with BlackMax® pipes

## Technical Data


### Product Properties

|                        |                                                                |
|------------------------|----------------------------------------------------------------|
| Material               | PVC                                                            |
| Colour                 | Black external wall with white internal bore                   |
| Approximate mass       | 5.5 kg                                                         |
| Additional Information | Requires 2 x DN225 BlackMax® Rubber Ring Iplex Code: GERSEW225 |

\*For short term, intermittent exposure. Contact Iplex for further details

### Product Dimensions

|                 |        |
|-----------------|--------|
| Nominal Size    | 225 mm |
| Angle (degrees) | 90°    |
| Dimension 'I'   | 265 mm |

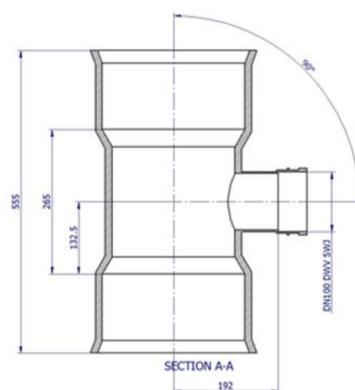

### Jointing Details

|                           |                                |
|---------------------------|--------------------------------|
| Joint type                | RRJ & SWJ                      |
| Rubber ring material      | Styrene Butadiene Rubber (SBR) |
| Maximum socket deflection | up to 2°                       |

PP Drainage &amp; Sewer Systems

**GWR25221090S**
**BlackMax® PVC Reducing Tee DN225 x DN100**  
**FFF Max RRJ x DWV SWJ Black/White**

## Standards

### Environmental Declarations and Standards

|                  |                                                                                                                                                                                       |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product standard | AS/NZS1260 PVC-U pipes and fittings for drain, waste and vent applications' & 'AS/NZS 5065 'Polyethylene and polypropylene pipes and fittings for drainage and sewerage applications' |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Material Properties

### Mechanical

|                            |      |
|----------------------------|------|
| Density 'Specific Gravity' | 1.45 |
|----------------------------|------|

### Thermal

|                                           |                                                                                        |
|-------------------------------------------|----------------------------------------------------------------------------------------|
| Allowable Operating Temperature - Degrees | Allowing Operating Temperature. Up to 50°C Re rating is applied for Temperatures >30°C |
|-------------------------------------------|----------------------------------------------------------------------------------------|

**Need help? | Merchants 1300 0 47539 | Civil 13 10 86**

**[www.iple.com.au](http://www.iple.com.au)**