

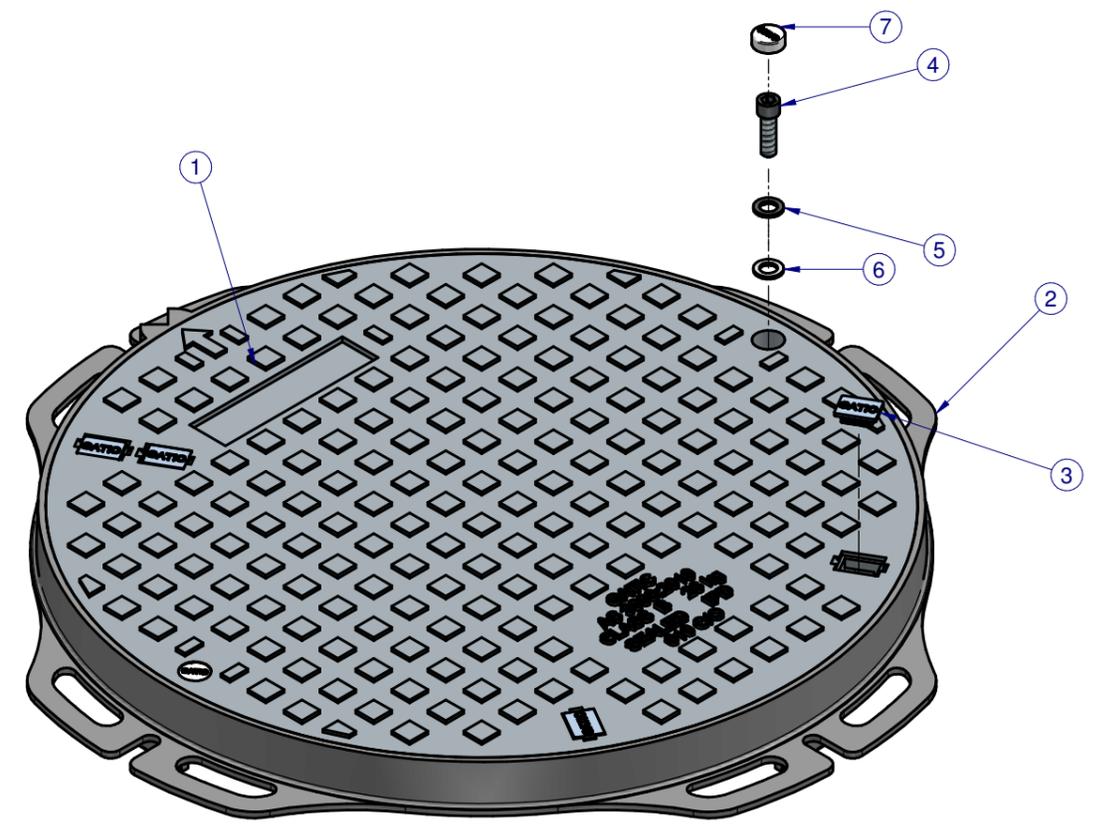


NAME PLATE TO BE ADDED AS PER THE PRODUCT CODE.
 GM300S6B2 - SEWER
 GM300S6B3 - STORM WATER
 GM300S6B4 - SAN - SEW

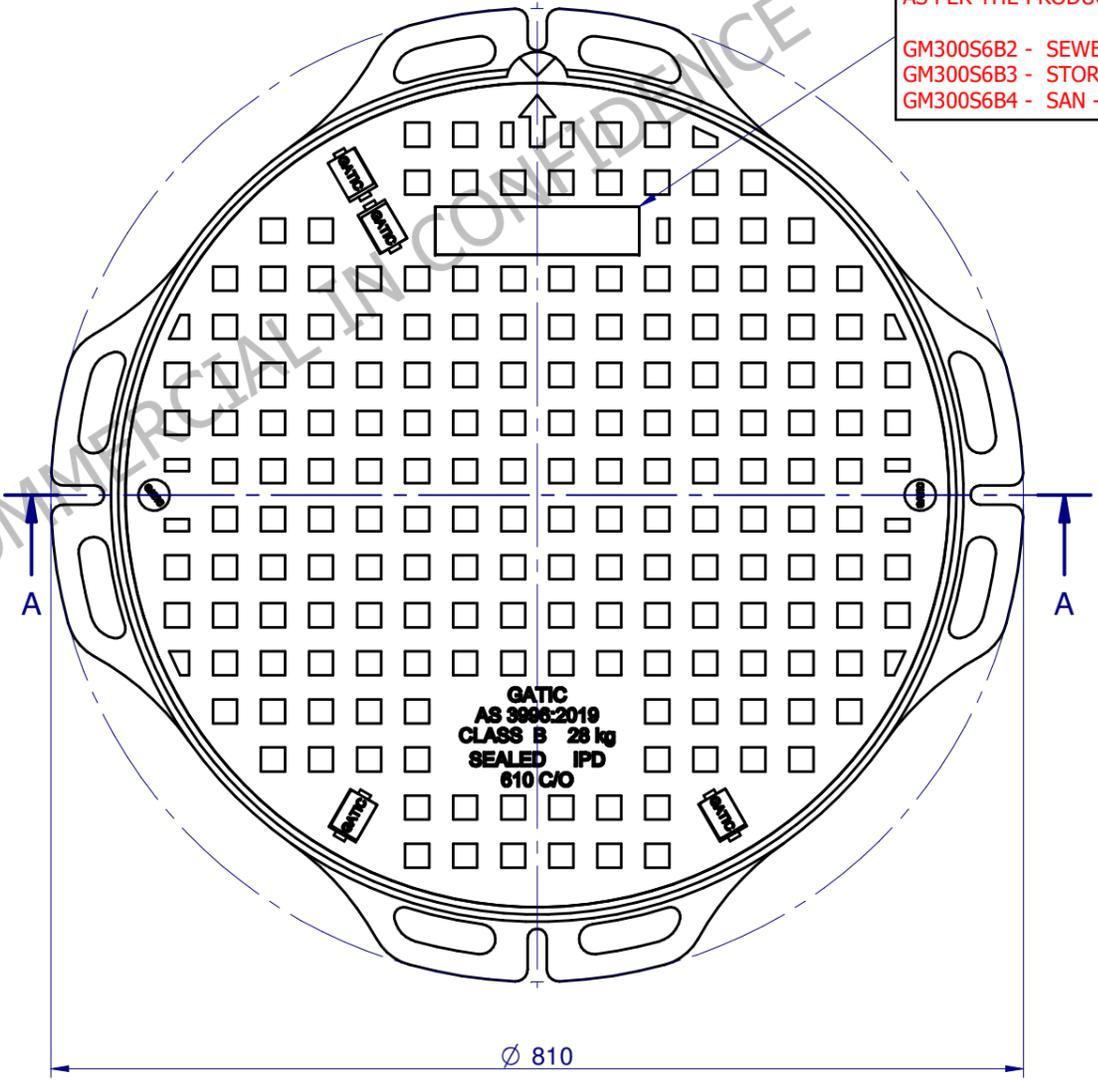

<input type="checkbox"/> SEWER <input type="checkbox"/>	STORM WATER	<input type="checkbox"/> SAN-SEW <input type="checkbox"/>
GM300S6B2	GM300S6B3	GM300S6B4

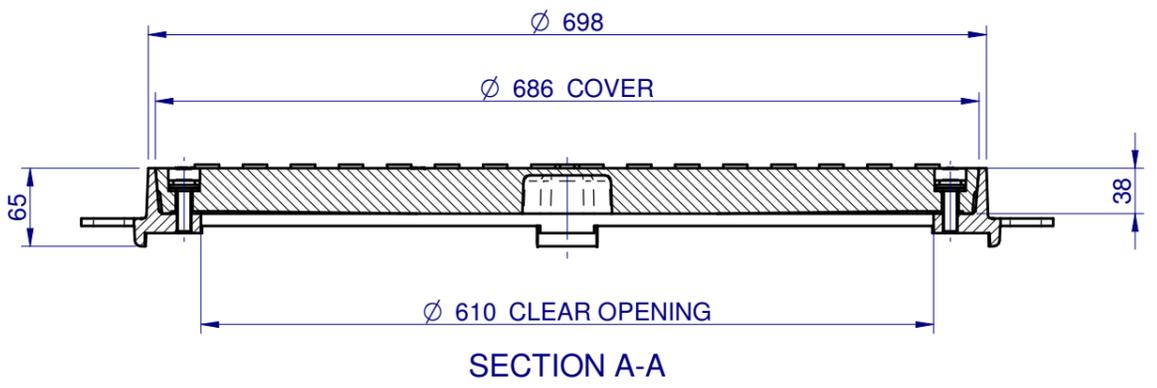

GM300S6B2 - GM300S6B3 - GM300S6B4						
Item No.	Drwg No.	Rev.	Title	Material	Qty.	Mass (kg)
1	1672	H	610mm C/O Circular Solid Top Cover Class B	Ductile Iron 500-10	1	27.8 kg
2	1336	H	610mm C/O Circular Frame Class B	Ductile Iron 500-10	1	14.8 kg
3	1681	A	Plastic Keyhole Plug	UV Stabilized Nylon	4	0.0 kg
4	6011	A	M12x40 Socket Head Cap Bolt	Stainless Steel, A4-70	2	0.1 kg
5	6012	A	M12 Washer	Stainless Steel, A4-70	2	0.0 kg
6	2917	A	M12 Washer	Nylon, general purpose	2	0.0 kg
7	2854	C	Plastic Plug Ø26 mm	UV Stabilized Nylon	2	0.0 kg

REVISION G 25-06-21 NAME PLATE ADDED, COMPONENTS REVISED. F.M. M.B. F 07-08-20 COVER AND FRAME REVISED. F.M. S.S. No DATE DESCRIPTION BY CKD.		UNLESS OTHERWISE STATED ALL MEASURES IN MILLIMETERS. GENERAL CAST TOLERANCES: CT9 TO ISO 8062. CASTING RADII: 3 mm DRAFT TAPERS: 2°		LINEAR MACHINING TOLERANCE: X. ±0.25 mm X.X ±0.10 mm ANGULAR MACHINING TOLERANCE: X. ±0.5° X.X ±0.1°		NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening FINISH: ALL CAST SURFACES TO BE PAINTED AS SPECIFIED. FABRICATED COMPONENTS TO BE HOT DIP GALVANISED TO AS4680. LIGHT FILM OF GATIC SEALING GREASE TO BE APPLIED ON ALL MACHINED SURFACES.		GATIC GATIC PTY LTD 9-15 Radford Road, PO Box 312, Reservoir VIC. 3073 Ph: 03 9316 2666 Fax: 03 9315 0099 www.gatic.com.au		THIRD ANGLE PROJECTION		BY: C.A. DATE: 25-09-05 DRAWN: H.L. DATE: 27-01-09 CHECKED: S.S. DATE: 27-01-09 APPROVED: H.B. DATE: 27-01-09		CODE: REFER TABLE SCALE: N.T.S. FORMAT: A3 SHEET: 1 of 1		TITLE: 610 C/O CIRCULAR SOLID TOP COVER & FRAME ASSEMBLY CLASS B MATERIAL: MASS: 42.8 kg DRG. No: 1739 REV: G	
---	--	---	--	---	--	---	--	--	--	------------------------	--	--	--	---	--	--	--