
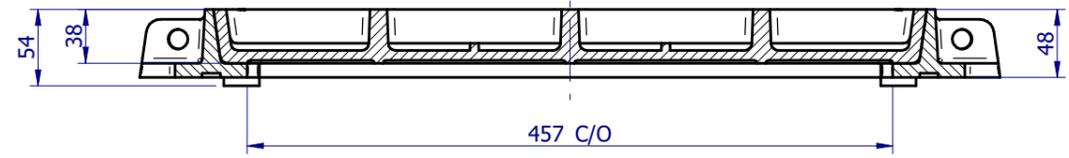


SECTION B-B

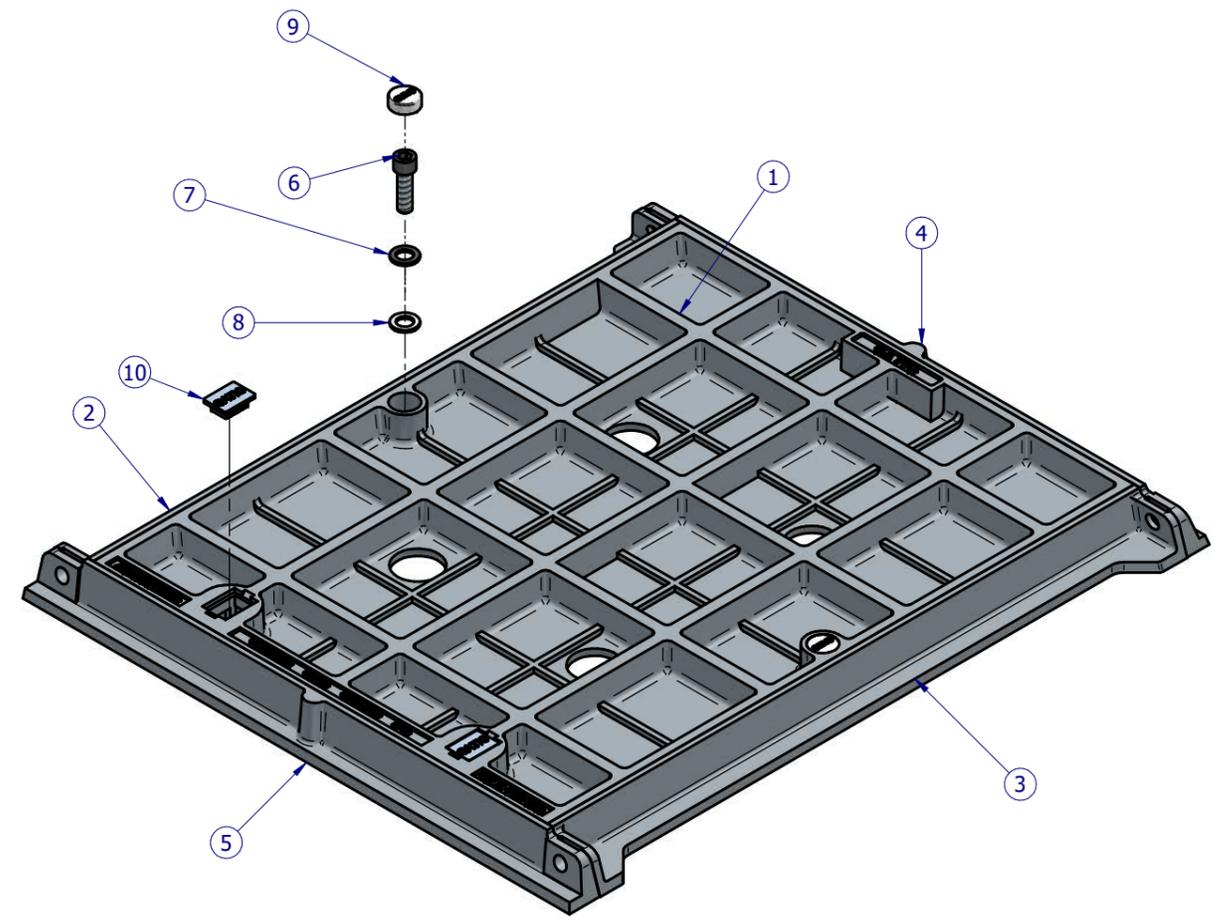

SECTION A-A

GM301C46B						
Item #	Drwg #	Rev #	Title	Material	Qty	Mass [kg]
1	2743	B	457X610 C/O Concrete Infill Cover Class B	Ductile Iron 500-10	1	33.7 kg
2	2704	B	610 mm LH Side Bar Class B	Ductile Iron 500-10	1	4.3 kg
3	2703	B	610 mm RH Side Bar Class B	Ductile Iron 500-10	1	4.3 kg
4	2794	B	457 mm Under Cut Bar Class B	Ductile Iron 500-10	1	3.4 kg
5	2795	B	457 mm Draw Cut Bar Class B	Ductile Iron 500-10	1	3.7 kg
6	6011	A	M12x40 Socket Head Cap Bolt	Stainless Steel, A4-70	2	0.1 kg
7	6012	A	M12 Washer	Stainless Steel, A4-70	2	0.0 kg
8	2917	A	M12 Washer	Nylon, general purpose	2	0.0 kg
9	2854	C	Plastic Plug Ø26 mm	UV Stabilized Nylon	2	0.0 kg
10	1681	A	Plastic Keyhole Plug	UV Stabilized Nylon	2	0.0 kg

© Copyright : Gatic Pty Ltd - 2021

REVISION	No	DATE	DESCRIPTION	BY	CHKD.
B	27-01-21		COMPONENTS REVISED.	F.M.	S.S.
A	XX-XX-XX		INITIAL RELEASE.	S.S.	S.S.

**UNLESS OTHERWISE STATED**  
 ALL MEASURES IN MILLIMETERS.  
 GENERAL CAST TOLERANCES:  
 CT9 to ISO 8062.  
 CASTING RADII: 3 mm  
 DRAFT TAPERS: 2°


LINEAR MACHINING TOLERANCE:  
 X. ±0.25 mm  
 X.X ±0.10 mm

ANGULAR MACHINING TOLERANCE:  
 X. ±0.5°  
 X.X ±0.1°

NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening

**FINISH:** ALL CAST SURFACES TO BE PAINTED AS SPECIFIED. FABRICATED COMPONENTS TO BE HOT DIP GALVANISED TO AS/NZS 4680. LIGHT FILM OF GATIC SEALING GREASE TO BE APPLIED ON ALL MACHINED SURFACES.

**GATIC**  
 GATIC PTY LTD  
 9-15 Radford Road, PO Box 312, Reservoir VIC. 3073  
 Ph- 03 9316 2666 Fax- 03 9315 0099 www.gatic.com.au



DESIGNED:	BY	DATE
F.M.	F.M.	25-06-08
DRAWN:	BY	DATE
F.M.	F.M.	25-06-08
CHECKED:	BY	DATE
S.S.	S.S.	27-06-08
APPROVED:	BY	DATE
H.B.	H.B.	27-06-08

CODE:	TITLE:	SCALE:	MATERIAL:	DRG. No:	MASS:	REV:
GM301C46B	457x610 C/O CONCRETE INFILL COVER & FRAME ASSEMBLY CLASS B	N.T.S.			49.5 kg	B
FORMAT:	SHEET:		2784			
A3	1 of 1					