


SECTION A-A

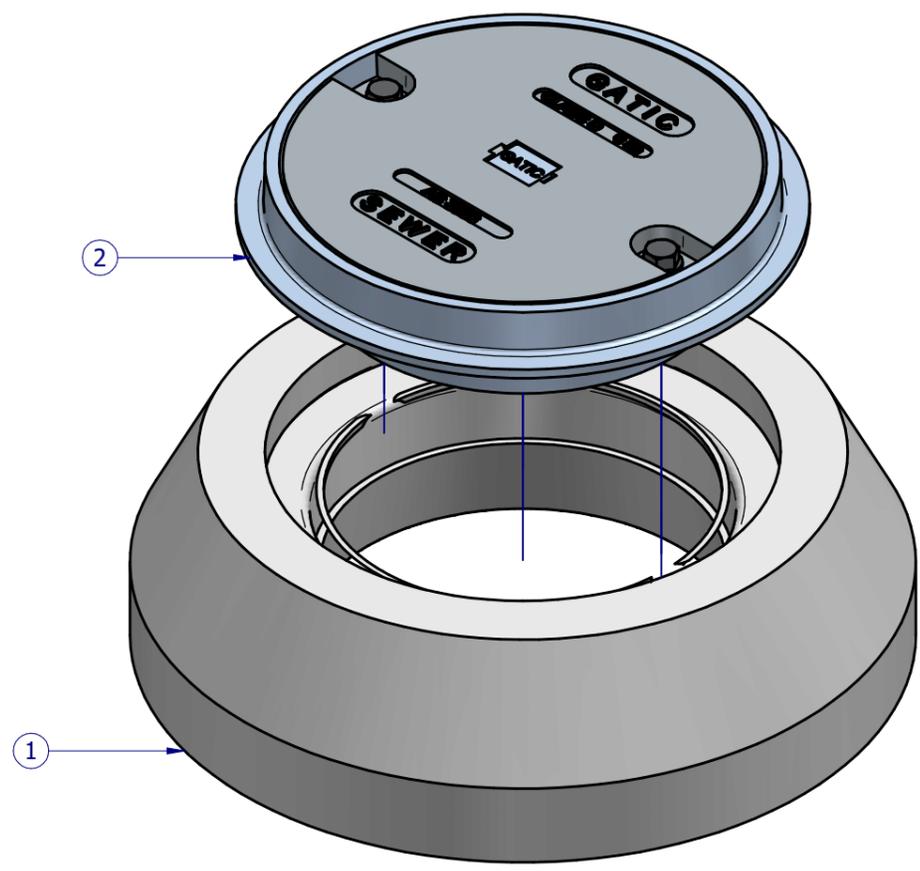

| GMMM1  |        |       |                   |     |           |
|--------|--------|-------|-------------------|-----|-----------|
| Item # | Drwg # | Rev # | Title             | Qty | Mass (kg) |
| 1      | 2966   | B     | GM721 Assembly    | 1   | 27.0 kg   |
| 2      | 2965   | D     | Concrete Encasing | 1   | 11.2 kg   |

| REVISION | No       | DATE | DESCRIPTION         | BY   | CKD. |
|----------|----------|------|---------------------|------|------|
| C        | 25-10-22 |      | COMPONENTS REVISED. | F.M. | M.B. |
| B        | 25-01-21 |      | COMPONENTS REVISED. | F.M. | S.S. |
| A        | 15-05-10 |      | INITIAL RELEASE.    | F.M. | S.S. |

**UNLESS OTHERWISE STATED**  
 ALL MEASURES IN MILLIMETERS.  
 GENERAL CAST TOLERANCES:  
 CT9 to ISO 8062.  
 CASTING RADII: 3 mm  
 DRAFT TAPERS: 2°


LINEAR MACHINING TOLERANCE:  
 X. ±0.25 mm  
 X.X ±0.10 mm

ANGULAR MACHINING TOLERANCE:  
 X. ±0.5°  
 X.X ±0.1°

NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening

**FINISH:** ALL CAST SURFACES TO BE PAINTED BLACK.  
 FABRICATED COMPONENTS TO BE HOT DIP GALVANISED TO AS4680.  
 RUST PROOF SEALANT TO BE APPLIED ON ALL MACHINED SURFACES.

**GATIC**  
 GATIC PTY LTD  
 9-15 Radford Road, PO Box 312, Reservoir VIC. 3073  
 Ph- 03 9316 2666 Fax- 03 9315 0099 www.gatic.com.au



| DESIGNED: | BY   | DATE     | CODE:         |
|-----------|------|----------|---------------|
| F.M.      | F.M. | 13-05-11 | GMMM1         |
| CHECKED:  | BY   | DATE     | SCALE:        |
| S.S.      | S.S. | 13-05-11 | N.T.S.        |
| APPROVED: | BY   | DATE     | FORMAT:       |
| H.B.      | H.B. | 13-05-11 | A3            |
|           |      |          | SHEET: 1 of 1 |

| TITLE:   | DRG. No:      | REV: |
|--|---------------|------|
| GMMM1 - Ø229 C/O CONCRETE ENCASED ASSEMBLY CLASS D | 2967          | B    |
| MATERIAL:  | MASS: 38.4 kg |      |