
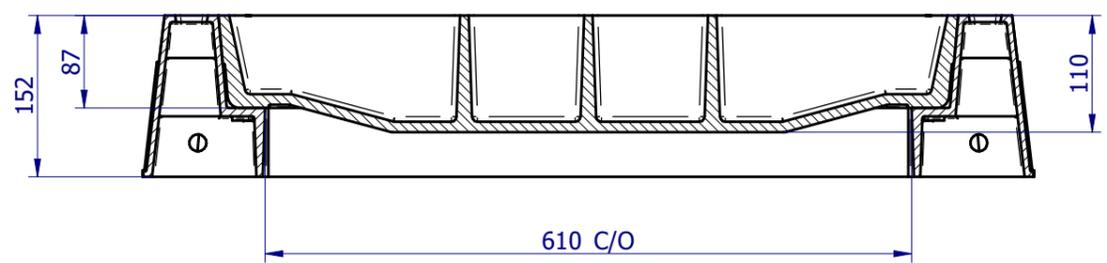


SECTION B-B

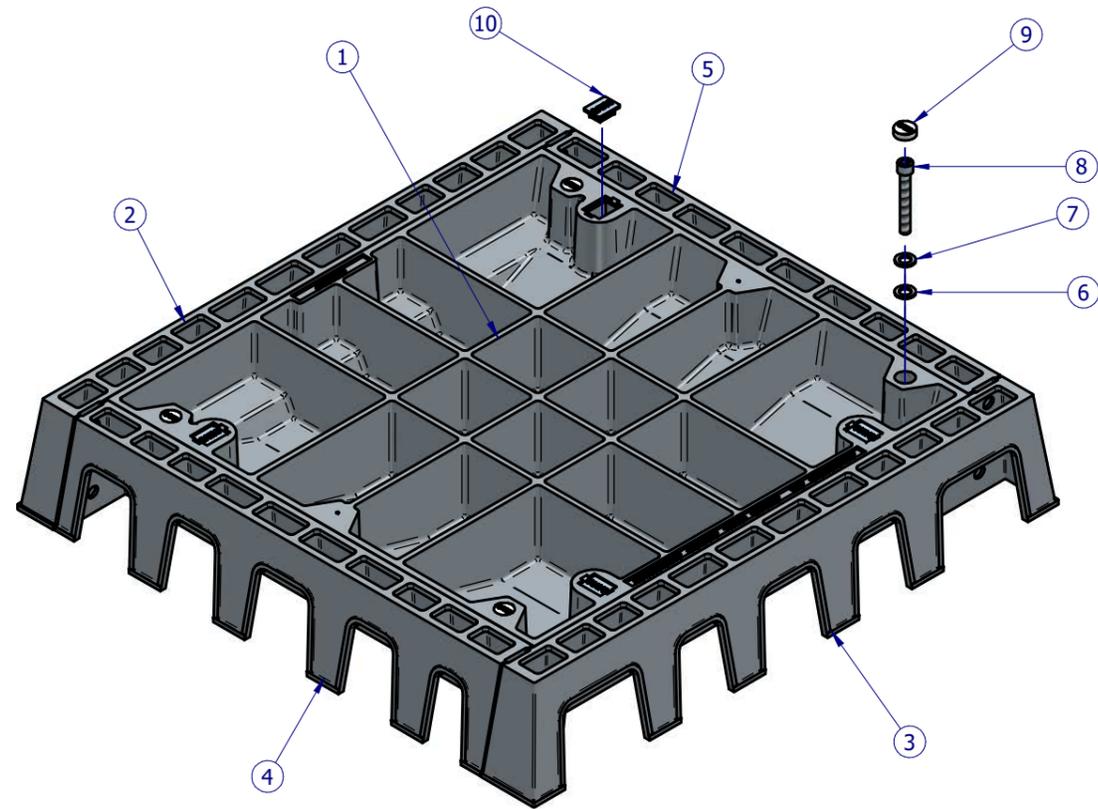

SECTION A-A

GM301C66G						
Item	DWG	Rev	Title	Material	Qty	Mass
1	1839	F	610X610 C/O Concrete Infill Cover Class G	Ductile Iron 500-10	1	96.3 kg
2	2819	C	610 mm Undercut Bar Class G	Ductile Iron 500-10	1	13.0 kg
3	2823	C	610 mm Drawcut Bar Class G	Ductile Iron 500-10	1	13.2 kg
4	2827	C	610 mm LH Side Bar Class G	Ductile Iron 500-10	1	12.2 kg
5	2831	C	610 mm RH Side Bar Class G	Ductile Iron 500-10	1	12.2 kg
6	2917	A	M12 Washer	Nylon, general purpose	4	0.0 kg
7	2918	A	M12 Washer	Stainless Steel, A4-70	4	0.0 kg
8	5995	A	M12x85 Socket Head Cap Bolt	Stainless Steel, A4-70	4	0.4 kg
9	2854	A	Plastic Plug Ø26 mm	UV Stabilized Nylon	4	0.0 kg
10	1681	A	Plastic Keyhole Plug	UV Stabilized Nylon	4	0.0 kg

REVISION	No	DATE	DESCRIPTION	BY	CHKD.
E	11-08-20	MODIFIED TO COMPLY WITH AS 3996 : 2019	F.M.	S.S.	
D	16-04-13	FRAMES MODIFIED	F.M.	S.S.	
C	02-10-09	MARKINGS LAYOUT UPDATED ON COVER	F.M.	S.S.	

UNLESS OTHERWISE STATED
ALL MEASURES IN MILLIMETERS.

GENERAL CAST TOLERANCES:
CT9 to ISO 8062.

CASTING RADII: 3 mm
DRAFT TAPERS: 2°

LINEAR MACHINING TOLERANCE:
X. ±0.25 mm
X.X ±0.10 mm

ANGULAR MACHINING TOLERANCE:
X. ±0.5°
X.X ±0.1°

NOM = Nominal; O/A = Overall; TYP = Typical; C/O = Clear Opening

FINISH: ALL CAST SURFACES TO BE PAINTED AS SPECIFIED. FABRICATED COMPONENTS TO BE HOT DIP GALVANISED TO AS4680. LIGHT FILM OF GATIC SEALING GREASE TO BE APPLIED ON ALL MACHINED SURFACES.

GATIC PTY LTD
9-15 Radford Road, PO Box 312, Reservoir VIC. 3073
Ph- 03 9316 2666 Fax- 03 9315 0099 www.gatic.com.au

THIRD ANGLE PROJECTION

DESIGNED:	BY	DATE
S.S.	S.S.	19-12-08
CHECKED:	BY	DATE
S.S.	S.S.	06-02-09
APPROVED:	BY	DATE
H.B.	H.B.	06-02-09

CODE: GM301C66G
SCALE: N.T.S.
FORMAT: A3
SHEET: 1 of 1

TITLE: 610 x 610 C/O CONCRETE INFILL COVER & FRAME ASSEMBLY CLASS G
MATERIAL: --
DRG. No: 2837
REVISION: E